


**Grid Maze**

X75212\_en

A maze has been drawn on the graph paper. All walls are either horizontal or vertical.

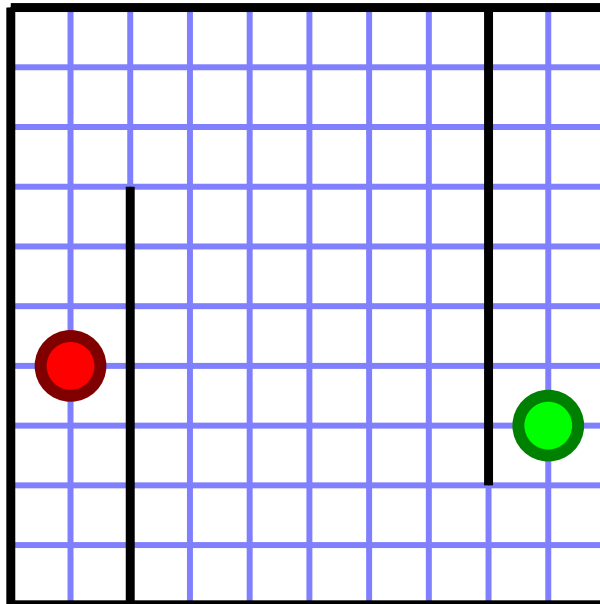

Your task is simple: find the shortest route from the red dot to the green dot. You can only move horizontally or vertically.

**NOTE:** We assume that you can move very close to the walls (at distance 0).

**Input**

The first line contains five numbers:  $N, X_1, Y_1, X_2, Y_2$ . Here  $N$  ( $1 \leq N \leq 500$ ) is the number of lines in the maze,  $(X_1, Y_1)$  are the coordinates of the red dot, and  $(X_2, Y_2)$  are the coordinates of the green dot.

Each of the following  $N$  lines describe one wall of the maze. A wall is described as four numbers  $x_1, y_1, x_2, y_2$ , where either  $y_1 = y_2$  or  $x_1 = x_2$ .

All coordinates are in range  $[-2000000000, +2000000000]$ .

**Output**

Output the length of the shortest route between the two dots. You should output **IMPOSSIBLE** if there is no route.

**Sample input**

```
6 1 6 9 7
0 0 10 0
0 0 0 10
10 0 10 10
0 10 10 10
2 3 2 10
8 0 8 8
```

**Sample output**

```
17
```

You obtain a route of length 17 by moving very close to the endings of both inner walls.

**Problem information**

Author : Eryk Kopczynski  
Generation : 2013-09-02 14:00:28

© *Jutge.org*, 2006–2013.  
<http://www.jutge.org>